
OFI Testing Equipment, Inc. - 11302 Steeplecrest Dr. Houston, TX 77065 USA **Phone: 832-320-7300 - Email: sales@ofite.com**

Ceramic Filter Disk, 120 Micron

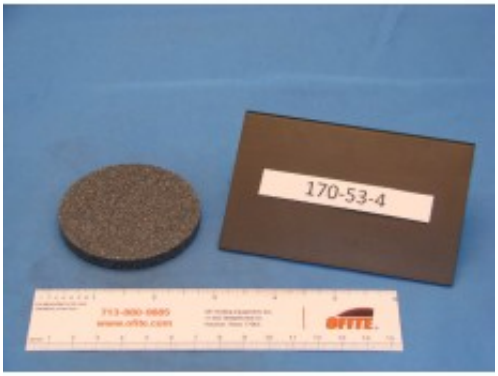

Brand:
Product Code: 170-53-4
Availability: 694
Lead Time: 45

Description

In the oilfield, ceramic filters are used as a replacement for filter paper in the HTHP filtration test. Available in a wide range of pore throat sizes, ceramic filters enable the operator to perform filtration tests at similar porosities to that of the formations being drilled, a big advantage over filter paper. Also, ceramic filters, unlike paper, have depth (usually ¼"), so invasion and return permeability studies may be performed and bridging characteristics of drilling and drill-in fluids may be analyzed. <h2>Specifications</h2> Diameter: 2.5" (6.35 cm) Thickness: .25" (.635 cm) Mean Pore Throat: 120 µm Permeability: 40 D Learn more about OFITE Ceramic Filter Disks.